

ARMPAC-505

5.6" TI-AM3354, ARM® Cortex™ A8 HMI Series



Features

- ARM Based HMI
- Fanless design
- Flat front panel touch screen
- TI-AM3354, ARM® Cortex™ A8 processor
- Onboard 512MB DDR3 SDRAM
- Onboard 512MB up to 1GB NAND Flash
- DC 9~36V wide-ranging power input
- LED backlight LCD

Specifications

System	
CPU	TI-AM3354, ARM Cortex A8(1x Core,1.0GHz)
System Chipset	NA
Memory	Onboard 512MB DDR3 SDRAM
External IO Port	
USB	2 x USB 2.0 type A
Serial / Parallel	1 x RS-232/422/485 DB9 , default RS-232
LAN	1 x 10/100MB LAN RJ-45 (POE for option)
Audio	1 x Line-out
Power	1 x 3-pin terminal block connector 1 x 2-pin Power switch connector
Option	TB-508CAN1 TB-508C1
Storage Space	
HDD	Onboard 512MB NAND Flash (1GB for option)
Movable device	1 x micro SD slot
Expansion	
Onboard expansion bus	1 x mini-PCIe slot (full size)
Display	
Display Type	5.6" TFT-LCD
Max. Resolution	640 x 480
Max. Color	262K
Luminance (cd/m²)	350
View Angle	140(H) /120(V)
Contrast	500:1
Backlight Lifetime	20,000 hrs
Touch Screen	
Type	Resistive Touch
Interface	ADC (Analog-to-Digital Converter)
Light Transmission(%)	80%
Power	
Power Input	DC 9~36V
Power Consumption	ARMPAC-505: 9W (MAX)

HMI Controller

All specifications and photos are subject to change without notice.

Sistemi Avanzati Elettronici S.r.l.

Via Marconi, 11D - 13836 Cossato (BI)

+39 015 983206 | info@sisav.it | www.sisav.it


Industrial Panel PC

HMI Controller

Industrial
Display Monitor

Box PC

Dimensions

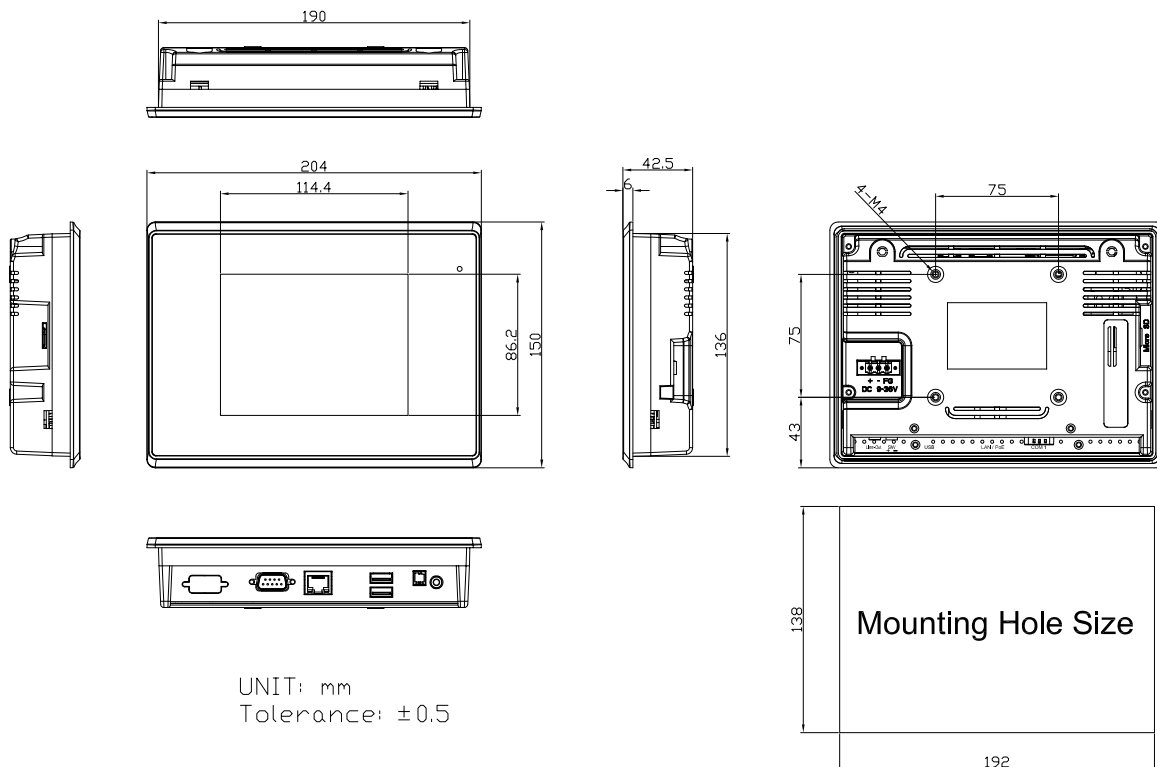

Mechanical

Construction	Plastic front bezel and Chassis
Mounting	Panel Mount , VESA mount 75x75
IP Rating	IP65 compliant front bezel
Dimensions	204 x 150 x 42.5 mm
Net Weight	0.8 kg

Environmental

Operating Temperature	0~50°C/ -20~60°C (option)
Storage Temperature	-30~70°C
Humidity	10 to 95% @ 40°C, non- condensing
Certificate	CE/FCC Class A/UL

Operating System Support

Linux 4.4.12 / WEC 7

V 1.6

All specifications and photos are subject to change without notice.

HMI Controller

Sistemi Avanzati Elettronici S.r.l.

Via Marconi, 11D - 13836 Cossato (BI)

+39 015 983206 | info@sisav.it | www.sisav.it