


ARMPAC-510(P)

10.1" TI-AM3354, ARM® Cortex™ A8 HMI Series

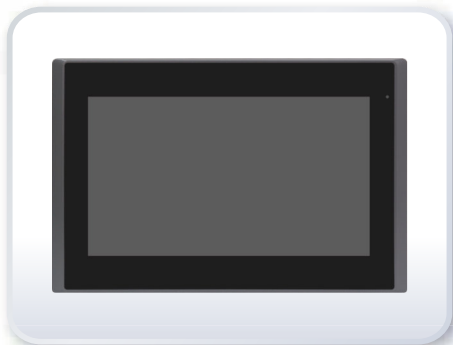

Features

- ARM Based HMI
- Fanless design
- Flat front panel touch screen
- TI-AM3354, ARM® Cortex™ A8 processor
- Onboard 512MB DDR3 SDRAM
- Onboard 512MB up to 1GB NAND Flash
- DC 9~36V wide-ranging power input
- LED backlight LCD
- Resistive touch window / Projected capacitive touch

Specifications

System	
CPU	TI-AM3354, ARM Cortex A8(1x Core,1.0GHz)
System Chipset	NA
Memory	Onboard 512MB DDR3 SDRAM
External IO Port	
USB	2 x USB 2.0 type A
Serial / Parallel	1 x RS-232/422/485 DB9 , default RS-232
LAN	1 x 10/100MB LAN RJ-45 (POE for option)
Audio	1 x Line-out
Power	1 x 3-pin terminal block connector 1 x 2-pin Power switch connector
Option	TB-508CAN1 TB-508C1
Storage Space	
HDD	Onboard 512MB NAND Flash (1GB for option)
Movable device	1 x micro SD slot
Expansion	
Onboard expansion bus	1 x mini-PCle slot (full size)
Display	
Display Type	10.1" TFT-LCD
Max. Resolution	1024 x 600
Max. Color	262K / 16.7M
Luminance (cd/m ²)	250
View Angle	140(H) / 120(V)
Contrast	500:1
Backlight Lifetime	15,000 hrs
Touch Screen	
Type	Resistive Touch (for R Model) Projected Capacitive Touch (for P Model) Glass (for G model)
Interface	ADC (Analog-to-Digital Converter) (Resistive Touch) / USB (Projected Capacitive Touch)
Light Transmission(%)	Resistive Touch : 80% Projected Capacitive : 90%

HMI Controller

All specifications and photos are subject to change without notice.

Sistemi Avanzati Elettronici S.r.l.

Via Marconi, 11D - 13836 Cossato (BI)

+39 015 983206 | info@sisav.it | www.sisav.it


Industrial Panel PC

HMI Controller

Industrial
Display Monitor

Box PC

Dimensions

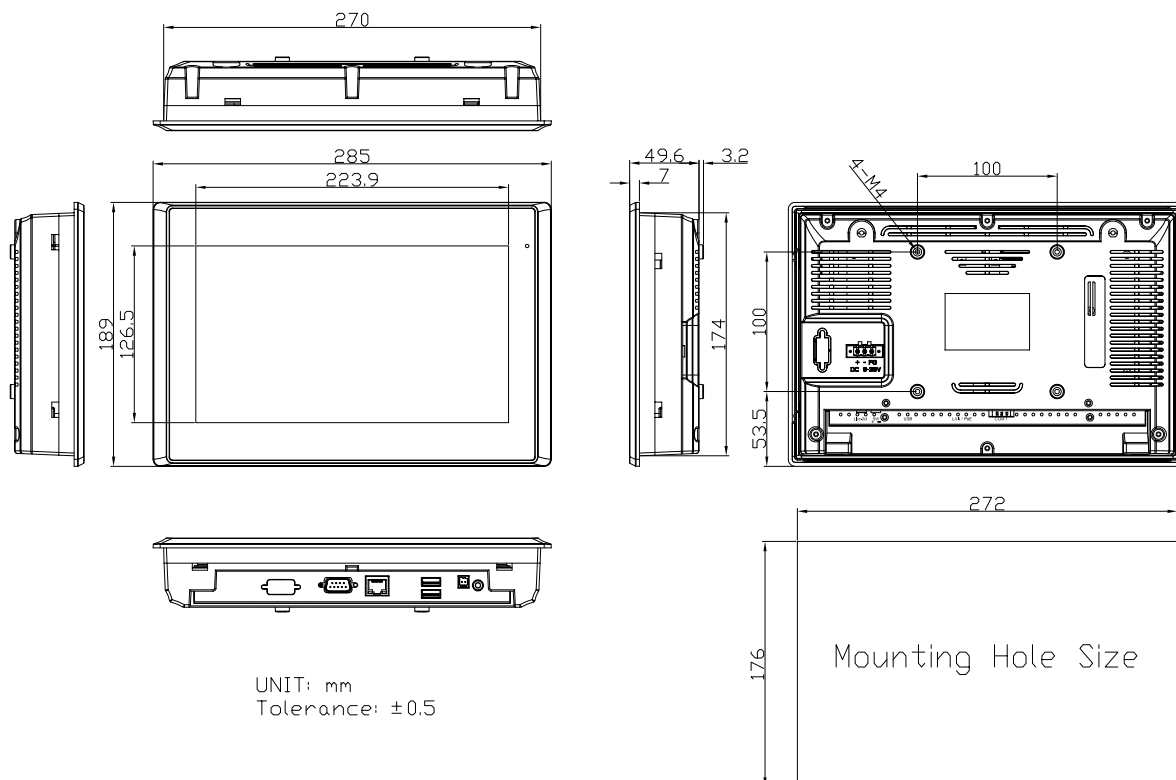

Power	
Power Input	DC 9~36V
Power Consumption	ARMPAC-510P: 7.8W (MAX)

Mechanical	
Construction	Plastic front bezel and Chassis
Mounting	Panel Mount , VESA mount 100x100
IP Rating	IP65 compliant front bezel
Dimensions	285 x 189 x 49.6 mm
Net Weight	1.3 kg

Environmental	
Operating Temperature	0~50°C/ -20~60°C (option)
Storage Temperature	-30~70°C
Humidity	10 to 95% @ 40°C, non- condensing
Certificate	CE/FCC Class A/UL

Operating System Support	
Linux 4.4.12 / WEC 7	

V 1.7

All specifications and photos are subject to change without notice.

HMI Controller

Sistemi Avanzati Elettronici S.r.l.

Via Marconi, 11D - 13836 Cossato (BI)

+39 015 983206 | info@sisav.it | www.sisav.it