

DPC-8210

DARVEEN

21.5" Industrial Touch Panel PC with 10th Gen Intel® Core™i Processor

Overview


The DPC-8210 is a fanless 21.5" industrial panel PC that supports 10th generation Intel® Core™i5 processors for high-performance computing. It features a modular design to allow easy CPU board or I/O board upgrades and ensures a stable system structure and reliable industrial performance. With a choice of 4:3 and 16:9 aspect ratios and optional resistive or capacitive touchscreen, the DPC-8210 provides display versatility. The aluminum alloy IP65-rated front panel, metal body, and excellent heat dissipation offer longevity, functionality, and rust resistance for industrial applications.

Features

- 21.5" LED-backlit LCD with capacitive or resistive touch screen
- Rugged aluminum enclosure and fanless design
- 10/11th Gen Intel® Core™i5 processor
- 3x COM, 4x USB, 4x LAN, 1x HDMI
- Supports VESA100 mount and panel mount
- IP65 compliant front panel



I/O Interfaces

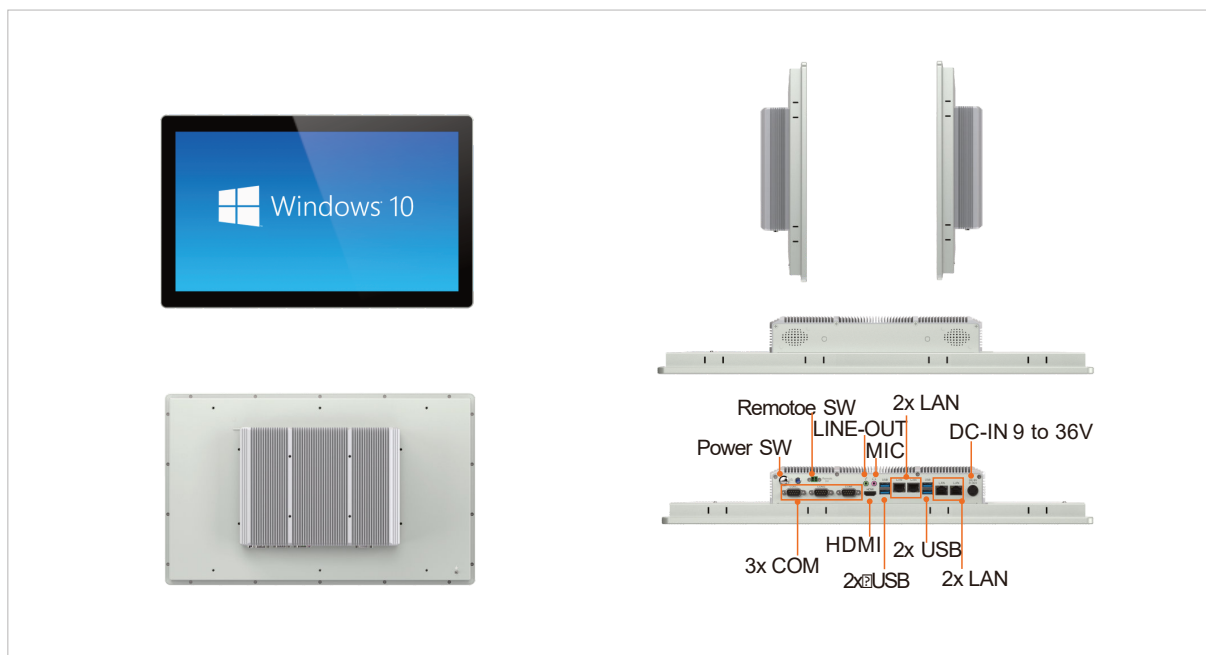

www.darveen.com

Sistemi Avanzati Elettronici S.r.l.

Via Marconi, 11D - 13836 Cossato (BI)

+39 015 983206 | info@sisav.it | www.sisav.it

DPC-8210

DARVEEN

Specifications

Display		
Size	21.5 inch	
Touch Type	5-wire resis@vetouch projected capaci@vemul@touch (op@onal)	
Transmi?ance	87% (capaci@ve)/ 80% (resis@ve)	
Control Interface	USB	
Surface Hardness	≥7H/≥3H	
Resolu@on	1920 x 1080	
Luminance	250 nits	
Contrast Ra@o	1000: 1	
View Angles	89 (lel), 89 (right), 89 (up),89 (down)	
LED Life@me	40,000 hrs	
Color	16.7M	
System		
CPU	Intel® Core™i5-10210U (1.6 GHz) quad-core eight-thread processor	Intel Core™i7-10710U (1.1 GHz) Six Core Twelve Thread Processor
Memory	2x DDR4 2666 SO-DIMM (upto 64GB)	2x DDR4 2666 SO-DIMM (up to 64GB)
Storage	1x 2.5" SATA HDD/SSD (op@onal) 1x full length Mini PCIe for mSATA SSD	
I/O Ports		
USB	4x USB 3.0	
Serial	3x COM (COM1 supports RS-232, COM2 and COM3 support RS-232/422/485)	
Ethernet	4x GbE LAN	
Display	1x HDMI	
Expansion Slot		
Mini PCIe	1x full length Mini PCIe for Wi-Fi 1x full length Mini PCIe for mSATA	
RF Communication		
Wi-Fi	Mini PCIe expansion (op@onal)	
Cellular	Mini PCIe expansion (op@onal)	
Bluetooth	Mini PCIe expansion (op@onal)	
Audio		
Audio	Mic in, line out	
Speaker	2Ω5W speaker	
Power		
Bu?on	Yes	
Remote Power On/Off	1x Remote switch connector	
DC Input	9 to 36VDC	
Power Connector	M8	
Power Consump@on	27W	29W
Igni@on On/Off	1x AC loss	
Power Adaptor	AC-DC, 12V@7.5A, 90W	
Operating System		
Windows	Windows 10, Windows 11	
Mechanical		
Dimensions (W x D x H)	528 x 326 x 73 mm (20.7 x 12.8 x 2.9 inches)	
Weight (N.W.)	7.9 kg (17.4 lbs)	
Moun@ng	Panel mount, wall mount bracket VESA100	
Material	Aluminum alloy panel, all-metal chassis	

DPC-8210

DARVEEN

Environment	
Operating Temperature	-10 to 50°C (14 to 122°F)
Storage Temperature	-20 to 60°C (-4 to 140°F)
Relative Humidity	10% to 95% @40°C (104°F), non-condensing
Vibration	5-500Hz, 0.026 G ² /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
IP Rating	IP65 compliant (for front panel)
Certification	
EMC	CE, FCC
Packing List	
Packing	1x DPC-8210 1x AC-DC power adapter 10x panel mounting buckles 1x warranty card

Dimensions

