

DPC-9185

DARVEEN

18.5" Industrial Touch Panel PC with Intel® Core™U-Series / Celeron® Processor

Overview


The DPC-9185 series is an 18.5" fanless industrial panel PC based on the Intel® Core™U-Series / Celeron® processor. It features a modular design to allow easy CPU board or I/O board upgrades to fulfill customer needs. The DPC-9185 series offers low-power consumption, rich I/O connectivity, and Wi-Fi module expansion. It boasts a sleek design with an IP65 aluminum alloy front panel and a durable metal body, offering superior heat dissipation and high reliability for operation in harsh industrial environments. The DPC-9185 series is an excellent HMI platform for industrial applications and factory automation.

Features

- 18.5" LED-backlit LCD with capacitive or resistive touch screen
- Rugged aluminum enclosure and fanless design
- Intel® Core™U-Series / Celeron® processor
- 2x COM, 4x USB, 2x LAN, 1x VGA, 1x HDMI
- Supports Wi-Fi, 4G
- VESA100 mount and panel mount compatibility
- IP65 compliant front panel



I/O Interfaces

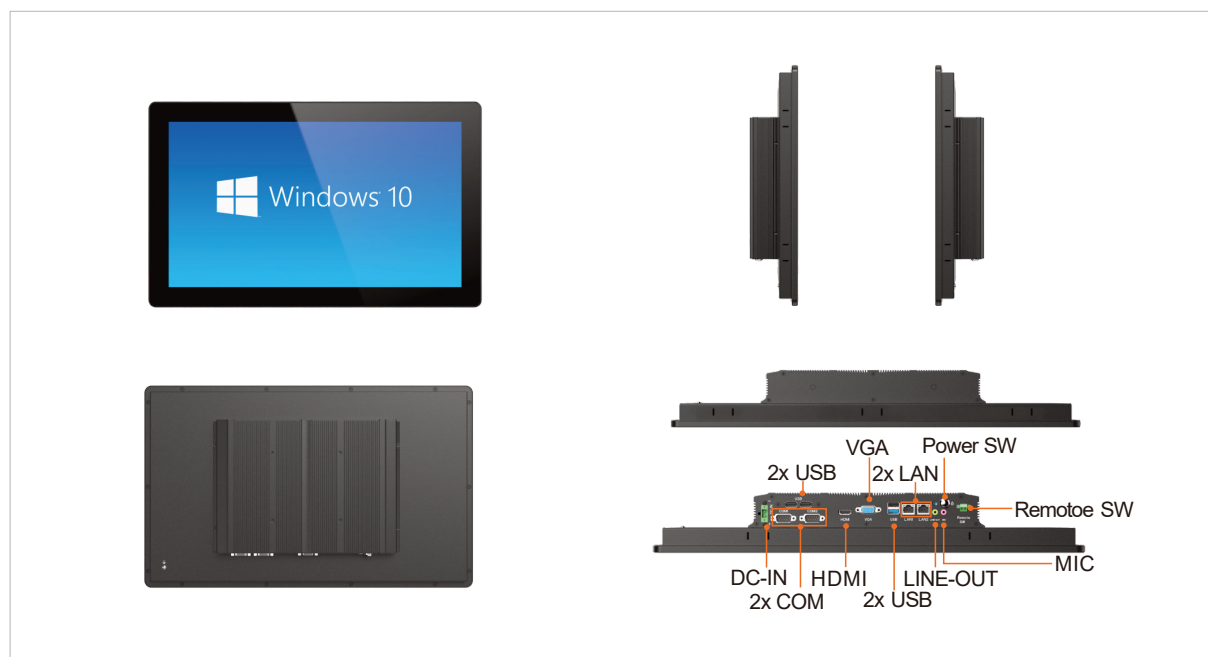

DPC-9185

DARVEEN

Specifications

Display				
Size	18.5 inch			
Touch Type	Projected capacitive multi-touch 5-wire resistive touch			
Transmittance	87% (capacitive)/ 80% (resistive)			
Control Interface	USB			
Surface Hardness	≥7H/≥3H			
Resolution	1920 x 1080			
Luminance	300 nits			
Contrast Ratio	1000: 1			
View Angles	85 (left), 85 (right), 85 (up),85 (down)			
LED Lifetime	30,000 hrs			
Color	16.7M			
System				
CPU	Intel® Celeron® J6412 (2.0 GHz) processor	Intel® Core™i5-6200U (2.3 GHz) processor	Intel® Core™i5-10210U (1.6 GHz) processor	Intel® Core™i7-10710U (1.1 GHz) processor
Memory	1x SO-DIMM DDR4- 3200MHz, up to 16GB	2x SO-DIMM DDR3- 1600MHz, up to 16GB	2x SO-DIMM DDR4- 2666MHz, up to 32GB	2x SO-DIMM DDR4- 2666MHz, up to 32GB
Storage	1x 2.5" SATAHDD/SSD (optional) 1x full length Mini PCIefor mSATASSD			
I/O Ports				
USB	2x USB 3.0, 2x USB 2.0			
Serial	2x COM (COM1 supports RS-232,COM2 supports RS-232/422/485)			
Ethernet	2x GbE LAN			
Display	1x HDMI, 1x VGA			
SIM Card Slot	1x SIM slot for 4G (optional)			
Antenna	2x SMA antenna holes			
Expansion Slot				
Mini PCIe	1x M.2 E for Wi-Fi 1x full length Mini PCIe for mSATA	1x full length Mini PCIefor Wi-Fi 1x full length Mini PCIefor mSATA		
RFCommunication				
Wi-Fi	Mini PCIeexpansion (optional)			
Cellular	Mini PCIeexpansion (optional)			
Bluetooth	Mini PCIeexpansion (optional)			
Audio				
Audio	Mic in, line out			
Speaker	2Ω5W speaker(optional)			
Power				
Button	M8			
Remote Power On/Off	1x Remote switch connector			
DC Input	12VDC (9-36VDC optional)			
Power Connector	2-pin phoenix terminal			
Power Consumption	23W	29W		
Power Adaptor	AC-DC, 12V@5A, 60W		AC-DC, 12V@7A, 84W	
Operating System				
Windows	Windows 10/11	Windows 7/10	Windows 10/11	
Mechanical				
Dimensions (W x D x H)	467.4 x 288 x 66 mm (18.4 x 11.3 x 2.6 inches)			
Weight (N.W.)	5.6 kg (12.35 lbs)			
Mounting	Panel mount, wall mount bracket VESA100			
Material	Aluminum alloy panel, all-metal chassis			

www.darveen.com
Sistemi Avanzati Elettronici S.r.l.

Via Marconi, 11D - 13836 Cossato (BI)

+39 015 983206 | info@sisav.it | www.sisav.it

DPC-9185

DARVEEN

Environment	
Operating Temperature	-10 to 50°C (14 to 122°F)
Storage Temperature	-20 to 60°C (-4 to 140°F)
Relative Humidity	10% to 95% @40°C (104°F), non-condensing
Vibration	5-500Hz, 0.026 G ² /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
IP Rating	IP65 compliant (for front panel)
Certification	
EMC	CE, FCC
Packing List	
Packing	1x DPC-9185 1x AC-DC power adapter 10x panel mounting buckles 1x warranty card

Dimensions

