

MC-346

DARVEEN


Marine Computer with 13th Gen Intel® Celeron®/Core™i3/i5/i7 Processor

Overview


The MC-346 marine computer features a rugged aluminum enclosure and a fanless design. It is powered by the 13th Gen Intel® Celeron®/Core™i3/i5/i7 Processor and includes 4x NMEA 0183 (RS-422/485) ports, 8 isolated DIO, and 2x removable 2.5" SSD drive bays. With 2x DP, 6x USB, 4x LAN, and supports TPM 2.0, it offers optional Wi-Fi, Bluetooth, LTE/5G, GPS, and CAN2.0 capabilities. It is IEC 60945/61162-1/2 and IACSE10 certified (Pending).

Features

- Rugged aluminum enclosure and fanless design
- 13th Gen Intel® Celeron®/Core™i3/i5/i7 Processor
- 4x NMEA 0183 (RS-422/485), 8 x isolated DIO ports
- 2x removable 2.5" SSD drive bays, RAID 0, 1 Hot-swap
- 2x DP, 6x USB, 4x 2.5GbE LAN, TPM 2.0
- Optional Wi-Fi, Bluetooth, LTE/5G, GPS, CAN2.0
- IEC 60945/61162-1/2, IACSE10 certified (Pending)



I/O Interfaces

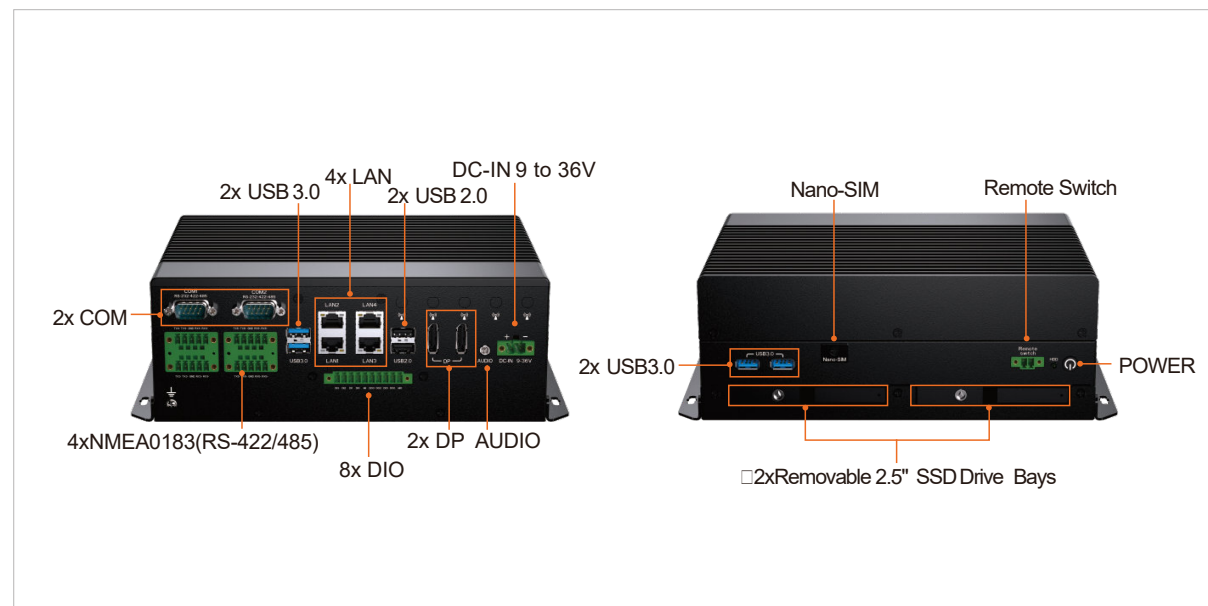

MC-346

DARVEEN


Specifications

System	
CPU	Intel Celeron®-7305E/Core™i3-1315UE Intel Core™i5-1345UE/Intel Core™i7-1365UE processor
Memory	2x SO-DIMM DDR5-4800/5200 MT/s (up to 64GB)
Storage	1x M.2 Key M 2242/2280, Nvme PCIe4 SSD 2x removable 2.5" SSDdrive bays, RAID 0,1 Hot-swap
GPU	Intel® UHD Graphics
TPM	Built-in onboard hardware TPM2.0-NPCT760AABYX
Watchdog Timer	SoFware programmable supports 256 levels system reset
I/O Ports	
USB Port	4x USB3.0, 2x USB2.0
Serial Port	4x NMEA0183 (RS-422/485),2x DB9(RS-232/422/485)
Ethernet	4x 2.5GbE LAN
Display Port	2x DP++ (Up to 4K each)
SIM Card Slot	1x SIM
DIO	8x isolated DIO
CAN bus	2x CAN2.0B (opBonal)
Expansion Slot	
Mini-PCle	1x Mini PCIe slot
M.2	1x M.2 KeyM 2242/2280 Nvme, 1x M.2 E-Key2230, 1x M.2 B-Key3052
Antenna Hole	5x SMA-type
RFCommunication	
Wi-Fi	1x M.2 2230 E-Key(PCLexMac Wi-Fi 6)
Cellular	1x M.2 3052 B-Key(USB3.0)
Bluetooth	1x M.2 2230 E-Key(PCLexMac Wi-Fi 6)
GNSS	1x Mini PCIe(USB2.0)
Audio	
Audio	Mic in, line out
Power	
Bu@on	Yes
Remote Power On/Off	2-Pin phoenix terminal (3.81 mm)
DC Input	9 to 36V DC-IN (2-Pin Phoenix terminal 5.0 mm)
Power Mode	AT/ATX
Operating System	
Windows	Windows 10, windows 11
Linux	Ubuntu22.04
Mechanical	
Dimensions (W x D x H)	216 x 164 x 82mm (8.5 x 6.46 x 3.23 inches)
Weight (N.W.)	3.5kg (7.72 lbs)
MounBng	Wall-mount
Material	Aluminum alloy
Environment	
OperaBng Temperature	-20 to 60°C□(-4 to 140°F) with SSDAirflow 0.7m/s
Storage Temperature	-40 to 85°C□(-40 to 185°F)
RelaBveHumidity	5 to 95%, non-condensing
Certification	
EMC	CE,FCC,IEC60945/61162-1/2, IACSE10(Pending)

MC-346

DARVEEN

Dimensions

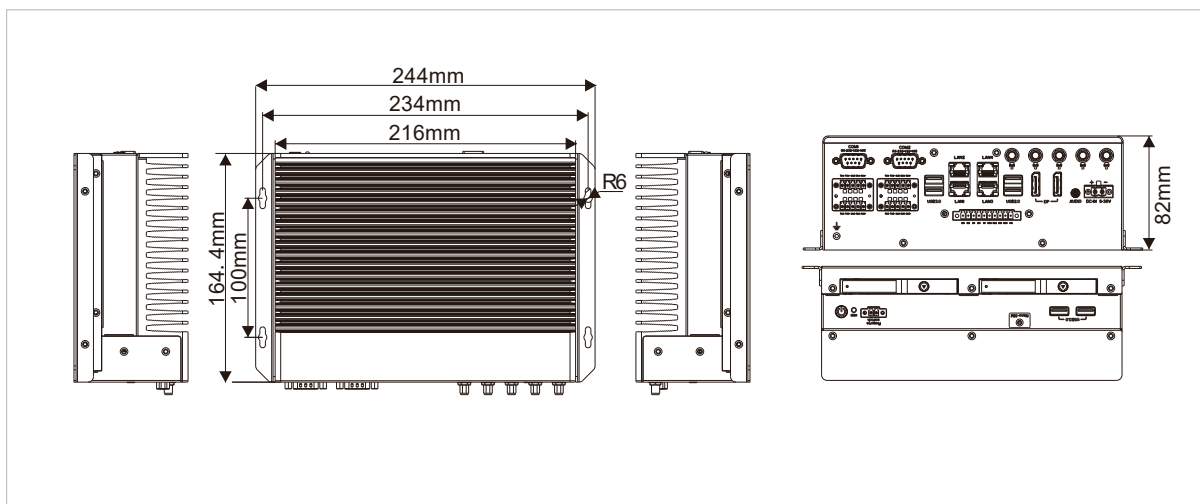

Ordering Information

Part No.	Description
MC-346-7305E	Celeron-7305E/4LAN/6COM/6USB/2DP/8DIO
MC-346-1315URE	i3-1315UE/4LAN/6COM/6USB/2DP/8DIO
MC-346-1345URE	i5-1345UE/4LAN/6COM/6USB/2DP/8DIO
MC-346-1365URE	i7-1365UE/4LAN/6COM/6USB/2DP/8DIO