




Athena IV baseboard with COM installed; heat sink removed for illustration purposes

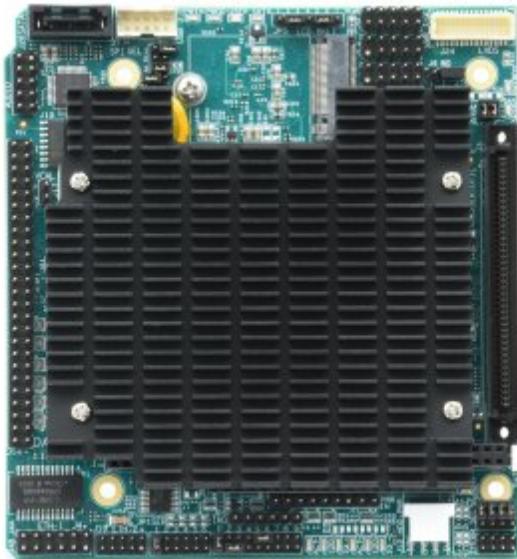

Athena IV with heat sink installed

FEATURES


COM-based architecture for long product life and performance scalability
Integrated professional quality data acquisition circuit saves space
Downward stacking PC/104 ISA bus connector supports a wide range of I/O modules for easy system I/O expansion
M.2 2230 SATA socket supports up to 128GB flashdisk
Form factor and most connectors backwards compatible with previous generations of Athena for easy product migration
Heat sink cooling
5VDC input voltage
4.175 x 4.475" / 106 x 114mm W x H
-40/+85°C operation fanless
Windows 10 and Ubuntu Linux OS support

SBC features:

Choice of E3845, E3940, or E3950 Atom CPU
4-8GB RAM soldered on COM
Up to 128GB eMMC Flash integrated onto COM
2 gigabit Ethernet ports
VGA + Single-channel 24-bit LVDS
1 USB 3.0 port + 4 USB 2.0 ports
4 RS-232/422/485 serial ports with dual software/jumper configuration control
HDA audio (ALC262)
7-pin SATA connector plus M.2 2230 socket
On-board RTC backup battery plus external battery connector

Data acquisition subsystem features:

16 single-ended / 8 differential analog inputs
16-bit A/D resolution
Unipolar and bipolar analog inputs
Single-ended and differential input configuration
Programmable gain 1/2/4/8 providing input ranges +/-10V / 0-10V down to +/- 1.25V / 0-1.25V

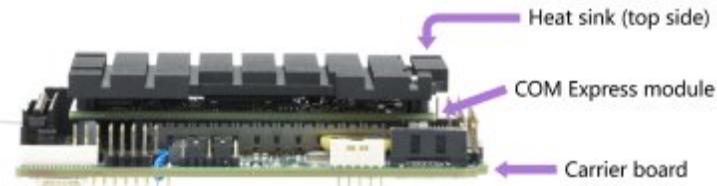

A COM-based SBC consists of 3 elements: carrier board, COM, and thermal solution

- 150KHz maximum A/D sample rate, single-channel and multi-channel mode
- Internal clock / external clock / software A/D triggering
- Single-channel and multi-channel-scan A/D operation
- Interrupts with FIFO to support reliable high-speed sampling
- 4 12-bit single-ended analog outputs +/-10V, +/-5V, 0-10V and 0-5V output ranges
- Autocalibration with Universal Driver software maintains accuracy over time and temperature
- 24 digital I/O, 3.3V logic / 5V tolerant inputs
- 2 programmable counter/timers for A/D timing and general counting purposes

Athena IV is the fourth generation in the Athena family of rugged, wide-temperature PC/104 SBCs with Integrated data acquisition, extending back to the original Athena in 2004. Athena IV is an excellent choice for:

- Customers using previous generations of Athena seeking to extend the lifetime of their existing product;
- Customers seeking to replace an obsolete PC/104 SBC with a newer generation one to extend their existing product's lifetime; or
- Customers seeking to build a PC/104 system expected to have a long lifetime.

◆ **Maintaining a legacy for long life applications**


Each generation of Athena maintained the same physical shape and most of the I/O connectors and features of the previous generations, while updating key features to stay current with the state of the art. In this way the Athena platform has maintained a low-impact migration path for customers with extended product lifecycles that outstrip the lifetimes of the CPU. Many customers have been able to maintain their products for up to 16 years as a result.

Click [here](#) to view a comparison chart of the features and differences between Athena II, Athena III, and Athena IV.

◆ **Mass storage**

Athena IV offers two methods for mass storage:

- An M.2 2230 size SATA socket is provided for onboard mass storage. Modules up to 128GB are available. This is the most common choice.
- A standard 7-pin SATA connector is available for connecting a standard 2.5" or other form factor hard drive. This connector can be used when higher capacity storage is needed. Diamond offers accessory board ACC-HDDMOUNT which allows a 2.5" drive to be mounted on the PC/104 stack.

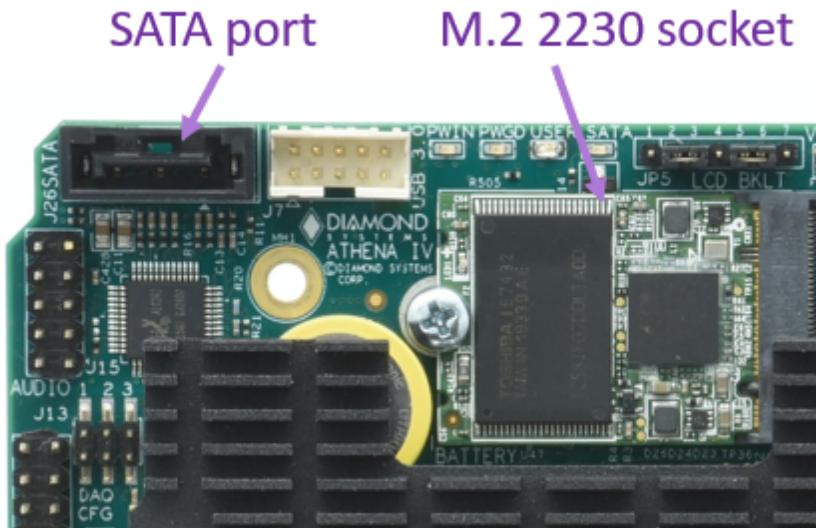

◆ **PC/104 expansion**

Athena IV uses the rugged and widely supported PC/104 ISA bus for I/O expansion. Choose from hundreds of I/O modules from vendors all over the world, including our own extensive selection using the links below. Although the board has both top side and bottom side PC/104 connectors, bottom side mounting of I/O modules is preferred to avoid blocking airflow over the top-side heat sink on Athena.

PC/104 specifications are available [here](#). Learn more about PC/104 [here](#).

[**Analog I/O expansion modules**](#)

[**Digital I/O expansion modules**](#)

[**Serial port expansion modules**](#)


◆ **Development Kit**

Development kits are available to support quick project startup. Each kit includes the Athena SBC, a cable kit, and a programmed 64GB flashdisk with your choice of Windows 10 or Linux operating system, ready to run. Simply plug in the flashdisk, attach the cables, add your keyboard, mouse, and display, and you're ready to boot into a fully functional OS. Configuration files and instructions are provided to rebuild the OS with your application. The Linux kit includes all the tools needed to rebuild the OS. The Windows 10 kit includes a runtime license.

◆ **Cable Kit**

Athena IV is designed to use most of the same cables as previous generations of Athena, along with upgrades for the latest technology. New with Athena IV is a second gigabit Ethernet port which is backwards compatible with the original board's 10/100 connector along with a USB 3.0 cable.

Cables are normally sold as complete kits. Individual cables may be available in some cases or may be ordered with minimum order quantities; contact us for details.

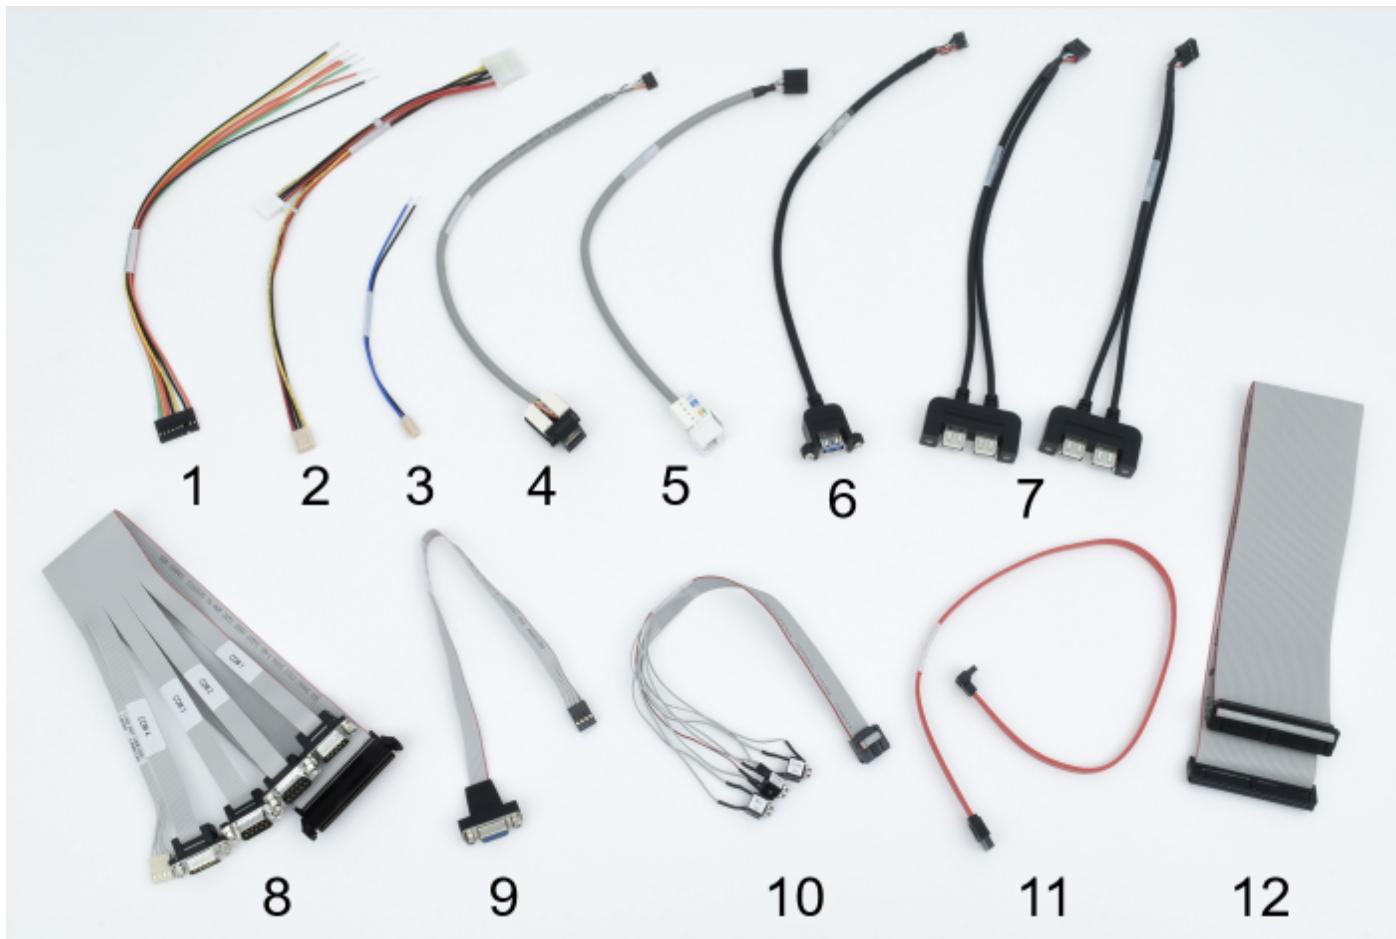


CK-ATH4-01 includes the following cables:

No.	Qty	Cable	Description	Drawing
1	1	6981009	Power I/O cable	Show
2	1	6981006	Output power cable	Show
3	1	6981011	External battery cable	Show
4	1	6981080	Gigabit Ethernet cable, RJ-45 socket, 10 pin board connector	Show
5	1	6981086	Gigabit Ethernet cable, RJ-45 socket, 12 pin board connector	Show
6	1	6980603	Dual USB 3.0 type A, latching	Show
7	1	6981012	Dual USB cable, ports 0 & 1	Show
8	1	6981014	Cable Assy, 80 Pin Socket, 2x20 to 4x Serial DB9M	-
9	1	6981030	VGA cable	Show
10	1	6981031	Audio cable	Show
11	1	6989101	SATA Cable, 7-Pin Data, Straight to Right Angle, 500mm	Show
12	1	C-50-18	50-conductor .1" pitch 18" ribbon cable, Data acquisition Cable	Show

◆ COM Advantage

◆ Advantages of a COM-based architecture


Athena IV uses a COM Express Type 10 "mini" Computer-on-Module (COM) to provide the core CPU functionality, mounted on a carrier board that provides the PC/104 expansion and the remaining I/O circuitry.

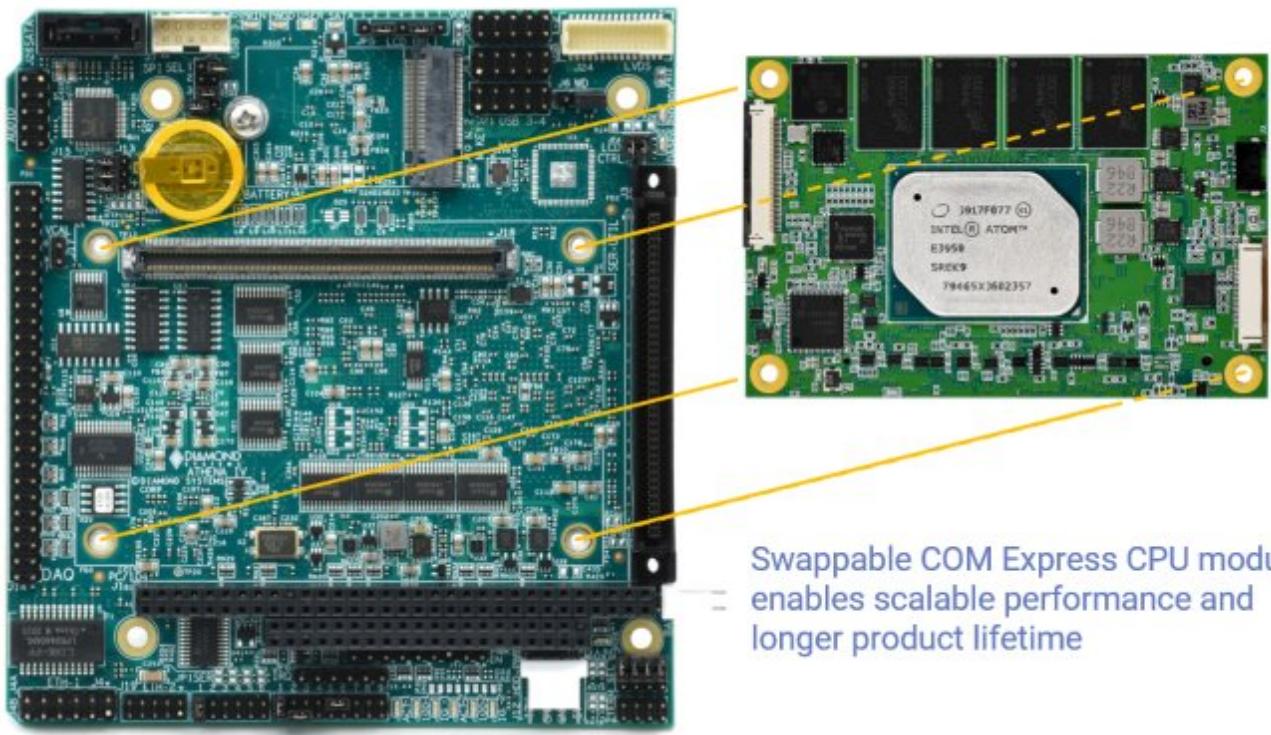

Swappable COM Express CPU module enables scalable performance and longer product lifetime

The use of a COM instead of a directly soldered CPU circuit provides several key advantages and benefits:

- **Higher feature density:** A 2-board solution provides twice the PCB area in the given footprint, allowing more circuitry and more features to be included.
- Longer lifetime: Since all COMs in a given form factor support essentially the same features, if the COM becomes obsolete or unavailable, a newer one can be used in its place, usually with minimal re-engineering.
- **Performance scalability:** COM Express modules are available from a number of suppliers around the world with multiple processor and memory options, allowing a single design to be used for a range of applications. For a lower-end application, choose a low-power, low-performance COM. For a higher end application, choose a higher performance COM. In both cases the rest of the system remains identical, allowing your investment in engineering and product design to be reused multiple times.
- **Earlier access to newest generation CPUs:** Most processors enter the market initially in the form of COMs. By using a COM-based SBC, you can gain access to the latest generation of CPU sooner than waiting for a true SBC with that processor to be available. Again, upgrading is simple since the rest of the system remains unchanged.

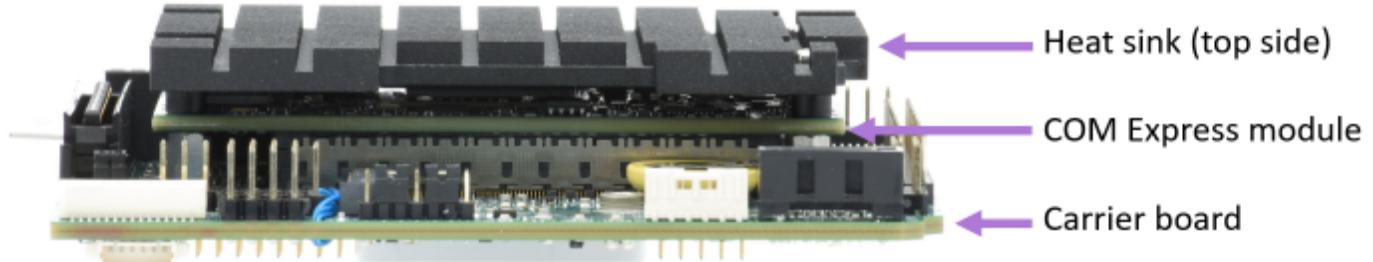

◆ Data Acquisition


◆ Integrated Data Acquisition

Athena IV is a member of Diamond's 2-in-1 series of SBCs with integrated data acquisition. For applications requiring precision analog I/O, a 2-in-1 SBC is an ideal choice because it reduces the number

of boards in the system, resulting in a system that is smaller, lighter, lower cost, and easier to assemble and maintain.

The data acquisition circuit on Athena IV includes 16 channels of 16-bit A/D, 4 channels of 12-bit D/A, and 24 channels of digital I/O. The analog inputs feature single-ended and differential configuration, programmable input ranges, and fault-protected channel multiplexors to protect against overvoltages. The D/A channels feature programmable output ranges and simultaneous update capability. Both A/D and D/A circuits include Diamond's advanced autocalibration technology, enabling the board to be quickly calibrated in software without the use of trim pots that are subject to tampering, mis-adjustment, or shock and vibration. The A/D and D/A circuits feature lower noise, higher bandwidth, and more configuration flexibility than competing analog I/O circuits.

All Diamond's analog and digital I/O circuits are supported by our Universal Driver programming library for Windows and Linux. This software package includes a suite of demo programs in source and executable form. A convenient GUI program supports quick and convenient operation of all I/O features and can be used for rapid prototyping as well as system debugging.

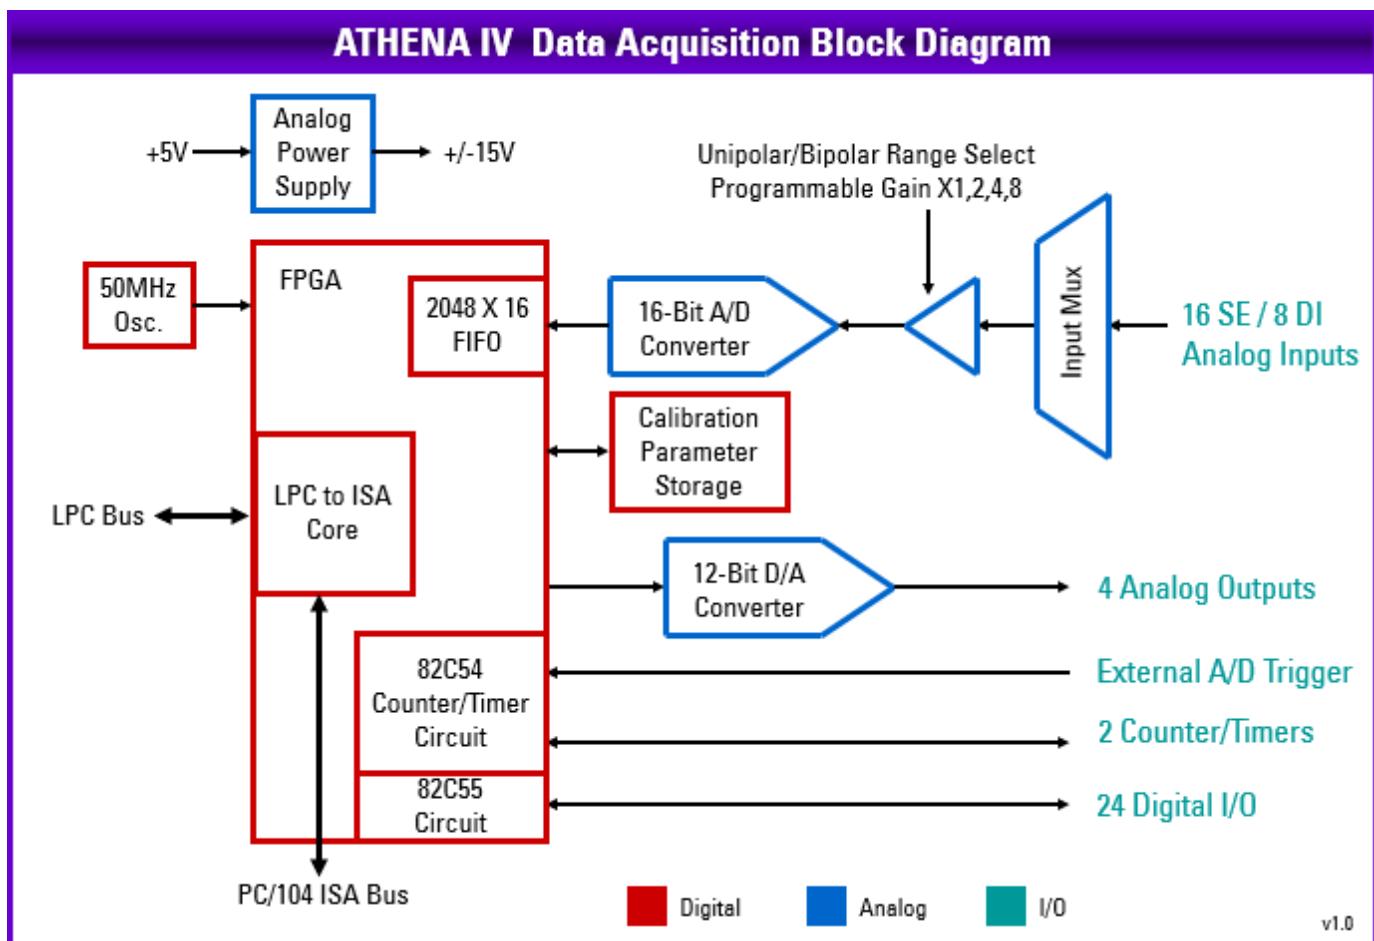

◆ Ordering Information

◆ Models and Accessories

Athena IV

ATH4-E3845-4GA

available models:

Availability:
Min Order Quantity

Athena IV SBC, E3845 1.91GHz CPU, 4GB RAM, With DAQ

ATH4-E3845-4GN

Athena IV SBC, E3845 1.91GHz CPU, 4GB RAM, No DAQ (minimum order quantity applies)

Min Order Quantity

ATH4-E3940-8G064A

Athena IV SBC, E3940 1.6GHz Quad Core CPU, 4GB RAM, With DAQ

Available

ATH4-E3940-8G064N

Athena IV SBC, E3940 CPU, 8GB RAM, 64GB eMMC, With DIO

Available

ATH4-E3950-8G128A

Athena IV SBC, E3950 CPU, 8GB RAM, 128GB eMMC, Available

ATH4-E3950-8G128N	With DAQ Athena IV SBC, E3950 CPU, 8GB RAM, 128GB eMMC, With DIO	Available
ATH4-BB01A	Athena IV Baseboard, with DAQ	Available
ATH4-BB01N	Athena IV Baseboard, without DAQ	Min Order Quantity
DK-ATH4-E3845A-LNX64	Development Kit, Athena IV SBC, E3845 CPU, with DAQ, Linux 64-Bit BSP	Available
DK-ATH4-E3845A-WE1064	Development Kit, Athena IV SBC, E3845 CPU, with DAQ, Windows 10 64-Bit BSP	Available
DK-ATH4-E3940-8G064A-LNX64	Dev Kit, Athena IV SBC, E3940 CPU, 64GB eMMC, Linux 64-bit OS	Available
DK-ATH4-E3940-8G064A-WE1064	Dev Kit, Athena IV SBC, E3940 CPU, 64GB eMMC, Windows 10 64-bit OS	Available
DK-ATH4-E3950-8G128A-LNX64	Dev Kit, Athena IV SBC, E3950 CPU, 64GB eMMC, Linux 64-bit OS	Available
DK-ATH4-E3950-8G128A-WE1064	Dev Kit, Athena IV SBC, E3950 CPU, 64GB eMMC, Windows 10 64-bit OS	Available
SDK-ATH4-E3845A-LNX64	Software Development Kit, Athena IV SBC with DAQ, Linux 64-bit OS	Available
SDK-ATH4-E3845A-WE1064	Software Development Kit, Athena IV SBC with DAQ, Windows 10 64-bit OS	Available
SDK-ATH4-E3940-8G064A-LNX64	Software Dev Kit, Athena IV SBC, E3940 CPU, 64GB eMMC, Linux 64-bit OS	Available
SDK-ATH4-E3940-8G064A-WE1064	Software Dev Kit, Athena IV SBC, E3940 CPU, 64GB eMMC, Windows 10 64-bit OS	Available
SDK-ATH4-E3950-8G128A-LNX64	Software Dev Kit, Athena IV SBC, E3950 CPU, 64GB eMMC, Linux 64-bit OS	Available
SDK-ATH4-E3950-8G128A-WE1064	Software Dev Kit, Athena IV SBC, E3950 CPU, 64GB eMMC, Windows 10 64-bit OS	Available

Cables and accessories

available models:

Availability:

CK-ATH4-01	CK-ATH4-01 cable kit
6981009	Cable, Power I/O, Stranded x9 to Trim wires x9, 12" L
6981006	Cable, Power Out, 4 pos Female to 22013047 4 pos and 22013067 IDC Skt 4 pos
6981011	Cable, Panel Input / External Battery, 770602-2 2 pos to stranded wire 2 pos, 6" L
6981080	Gigabit Ethernet cable, RJ-45 socket, 10 pin board connector
6981086	Gigabit Ethernet cable, RJ-45 socket, 12 pin board connector
6980603	Cable, USB 3.0, Latching 2x5 2mm to Type A Socket Panel Mount, 12" L
6981012	Cable, USB, 10-Pin Hdr to Dual USB skt w/ pnl mt inserts, 12" L
6981014	Cable Assy, 80 Pin Socket, 2x20 to 4x Serial DB9M
6981030	Cable, VGA, 2x4 .1" to DB15F HD, 12" L Ribbon
6981031	Cable, Audio, 2x5 .1" IDC F to x3 3.5mm Jack, 12" L Ribbon
6989101	SATA Cable, 7-Pin Data, Straight to Right Angle, 500mm
C-50-18	50-conductor .1" pitch 18" ribbon cable

www.diamondsystems.com | Sunnyvale, California USA | +1-650-810-2500 | sales@diamondsystems.com