

HDCorder-SDI

CompactPCI-Serial HD-SDI H.264 Video Encoder

The HDCorder-SDI is an intelligent high definition video recording solution that accepts a HD-SDI input at up to 1080p60 and encodes it to the H.264 video encoding standard. The CompactPCI-Serial board solution is ideal for demanding applications in Military, Communications, Transportation, mining and Energy industries.

In addition to capturing video and stereo audio data the HDCorder-SDI supports extraction of KLV (MISB 0605.3 compliant) embedded data contained within the HD-SDI signal. The video, audio and metadata are synchronized and transferred to the host system over the CompactPCI -Serial bus. An SDI monitor output is provided

The HDCorder-SDI also features optional on-board redundant storage to complement the host system storage and improve data integrity. This on-board cache acts as a rolling buffer, storing the most recently recorded data. This storage redundancy ensures no mission data is lost even when starved of host CPU attention in heavily loaded system configurations.

The HDCorder-SDI is a standard 3U CompactPCI -serial module and supported for Linux and Windows.



Applications

- Unmanned vehicles (UAV, ROV)
- Mission Recorder
- Rugged video recorders for marine, aviation
- Situational Awareness
- Remote Video Surveillance
- Border Security
- Traffic Monitoring and Control
- Video Acquisition and Analytics
- Solid state multi-channel video and sensor recorders

Features

- 1x HD-SDI input up to 1080p60
- Real-time HD H.264 encode at 1080p60
- Stereo audio capture from HD-SDI
- KLV Metadata capture from HD-SDI
- HD-SDI monitor output
- Optional onboard redundant storage (up to 16GBytes)
- Standard 3U CompactPCI-Serial mechanical form factor



**Advanced Micro
Peripherals**

THE EMBEDDED VIDEO EXPERTS

Aerial
Surveillance,
Mission
Recording
&
Border
Protection

Real-time
transmission of
High quality video,
Audio,
and
Synchronized
metadata

Ideally suited to
the demanding
applications, space
requirements and
environmental
conditions of
Military,
Transportation,
Mining and
Energy Industries



HDCorder-SDI

Rev A.00

CompactPCI-Serial HD-SDI H.264 Video Encoder

Technical Specification

HD-SDI Video Input

Flexible capture at up to 1080p60
HD-SDI monitor output

Audio Input

Embedded audio captured from HD-SDI input
Provides audio/video synchronisation

KLV Metadata

Embedded KLV metadata captured from HD-SDI input
MSB 0605.3 compliant
Synchronised with video/audio

H.264 Video Encoding

ITU-T H.264 (ISO/IEC 14496-10), supported profiles:
Baseline profile,
Main profile (I,P frame coding only)
High profile (I, P frame coding only) at level 4.1
Up to 1080p60 encode
CAVLC and CABAC coding
Supports Variable Bit Rate (VBR)
Supports Constant Bit Rate (CBR)

JPEG Encoder

JPEG (ISO/IEC 10918-1)
Baseline JPEG with JFIF support

Additional Features

On-board redundant storage (option)

Mechanical

Standard 3U CompactPCI-Serial form factor.
Operating temp 0°C to 60°C
Operating temp -40°C to +85°C (extended temp option)


Ordering Information

HDCORDER-SDI

H.264 HD Video Streamer (0 to 60°C)

HDCORDER-SDIEXT

H.264 HD Video Streamer (-40°C to +85°C)

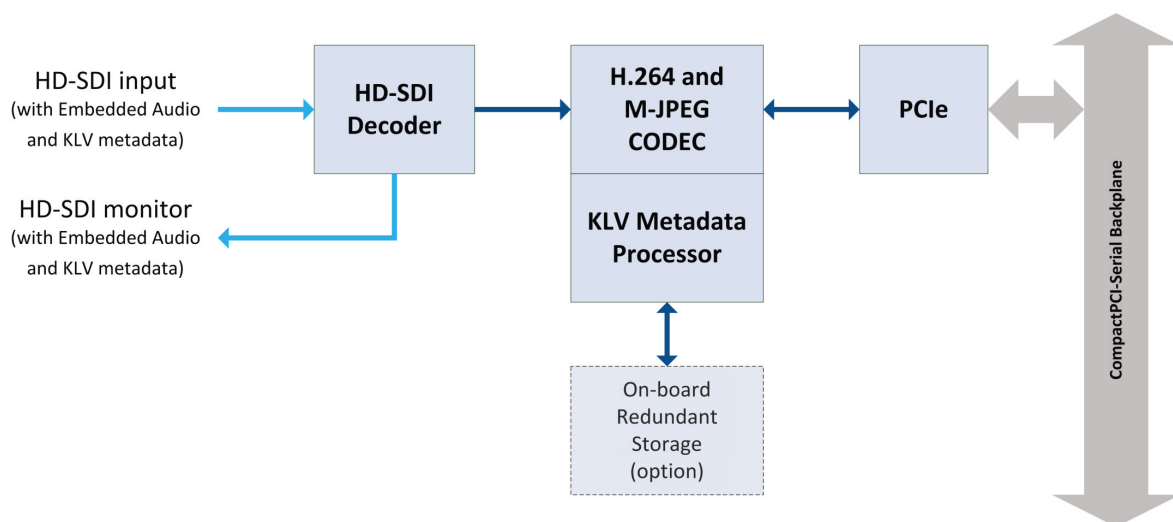

HDCorder-SDI Functional Diagram



**Advanced Micro
Peripherals**

THE EMBEDDED VIDEO EXPERTS

Sistemi Avanzati Elettronici S.r.l.

Via Marconi, 11D - 13836 Cossato (BI)

+39 015 983206 | info@sisav.it | www.sisav.it